



DNH^{AS}

**N-3770 Kragerø
NORWAY**
 Phone: (47) 35 98 56 00
 Fax: (47) 35 98 56 10
 E-mail: dnh@dnh.no
 Web-site: www.dnh.no

**DNH WW Ltd.
England** Phone:.....(44) 1908 275 000
 Fax:.....(44) 1908 275 100
 E-mail:.....dnh@dnh.co.uk

**DNH
France** Phone:.....(33) 1 5380 0276
 Fax:.....(33) 1 4588 1594
 E-mail:.....etienne@dnh.no

**DNH GmbH
Germany** Phone:.....(49) 040 6569 30-0
 Fax:.....(49) 040 6569 30-30
 E-mail:.....dnh@dnh.de

**DNH
Speakers Inc.
USA** Phone:.....(1) 484 494 5790
 Fax:.....(1) 484 494 5793
 E-mail:.....dnh@dnhspeakers.com

PROB-635(T)


ISO 9001 CERTIFIED

Transformer:
100Volt line

Primary connection:
6 : 9 100 Volt line


Secondary nominal
tappings:

1 : 4	30,0 W
1 : 3	15,0 W
2 : 4	10,0 W
1 : 2	7,5 W
3 : 4	4,0 W
2 : 3	2,0 W
4 : 5	0,5 W

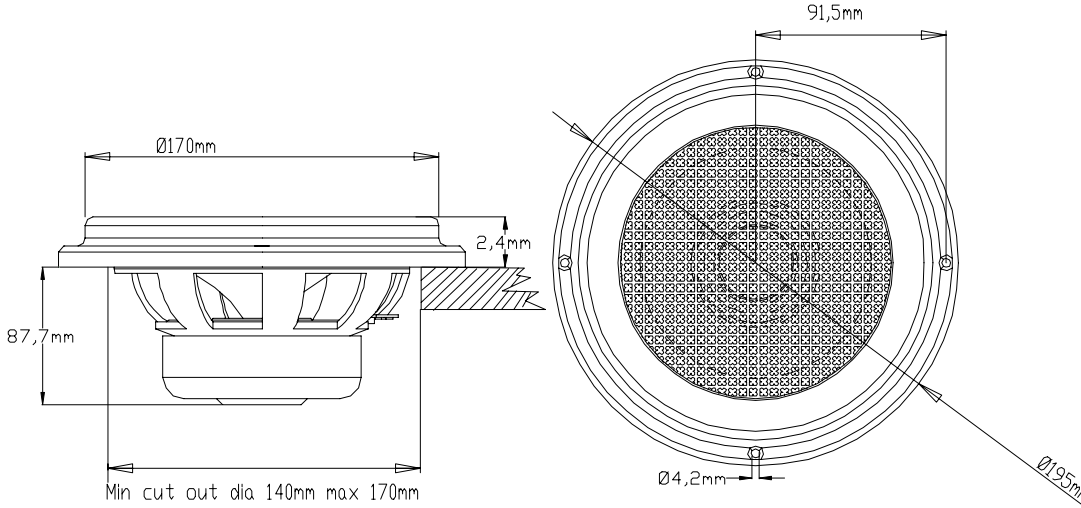

Included screws are made of brass or stainless steel depending on version.

Sound pressure levels at different frequencies at 1W/1m
1/3 octave pink noise.

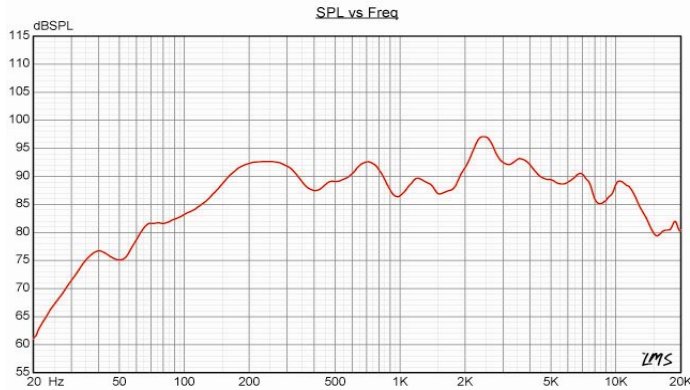

Material / Color Solid Brass or Stainless Steel
 Mounting Screws
 Termination Clips
 Weight (5,1 lb) 2,3 kg
 IP-rating
 Max. / min. amb. temp.... (212°F / -58°F) 100°C / -50°C
 Rated / max. power 30 W / 60 W
 SPL 1W/1m 92 dB
 SPL rated power 107 dB
 Effective freq. range 55 – 20000 Hz
 Dispersion (-6dB) 1kHz / 4kHz
 Directivity factor, Q (2kHz)
 Options Impedance, color, label

Installation, Operation and Maintenance Procedures

- Use clips or solder wire to the loudspeaker.
- Install loudspeaker grill by screws.
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- This loudspeaker is supplied with a 2 year warranty against defective workmanship.
- Separate screws and clips in box.



DNH reserves the right to alter specifications without notice.

Rev. 13.10.2006